
## ALL SEASONS ALLSPICE



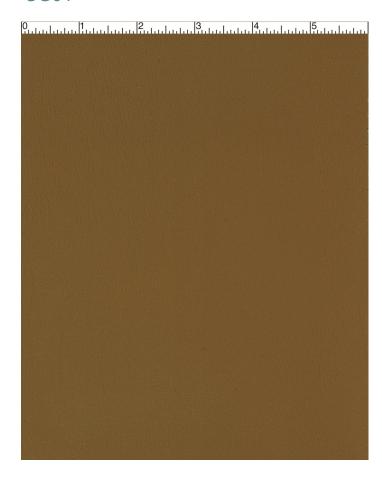

CATEGORY Seating

PROPERTIES ₩₩₩

CONTENT 100% Vinyl

BACKING 100% Polyester

FINISH PreFixx

WIDTH 54"

WEIGHT

36 oz./linear yard

SHOWN RR No

DIR

No

ROLL LENGTH 30 yards

VISUAL REPEAT

None

**BREAKING STRENGTH** 

Warp 110/Fill 85

**SEAM SLIPPAGE** 

Warp: N/A lbs. / Fill: N/A lbs.

ABRASION RESISTANCE

Passes 1,000,000 Double Rubs (Wyzenbeek)

Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

PILLING RESISTANCE

Class

**COLORFASTNESS TO CROCKING** 

Dry: Class 4 min/Wet: Class 4 mi

COLORFASTNESS TO LIGHT

650 hours

**APPLICATION** 

Atrium, Indoor, Marine, Outdoor

FLAMMABILITY

Passes Cal 117-2013; NFPA 260/UFAC Class 1; BIFMA; Boston Fire Dept. Code (BFD IX-1); FAA/FAR 25.853(a) & Appendix F Part I(a)(ii); Fed. Spec. CID A-A-2950/supercedes CCC-A-680A; FMVSS 302; NFPA 701 (small scale); NY/NJ Port Authority; IMO FTP 2010 Code MSC.307(88), Part 8, 3.1 & 3.2; IMO A.652 (16) 8.2 & 8.3; May comply with Cal. Tech. Bul. 133 when combined with appropriate components.

## **CLEANING**

WS: Water/Solvent Cleaner - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

**BC:** Bleach Cleanable - 1 part bleach, 9 parts water = 10% bleach, 90% water solution. Do not clean/disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.

Additional cleaning details at www.mayerfabrics.com

