


# FOUNDATION 10 AEGEAN

350-053

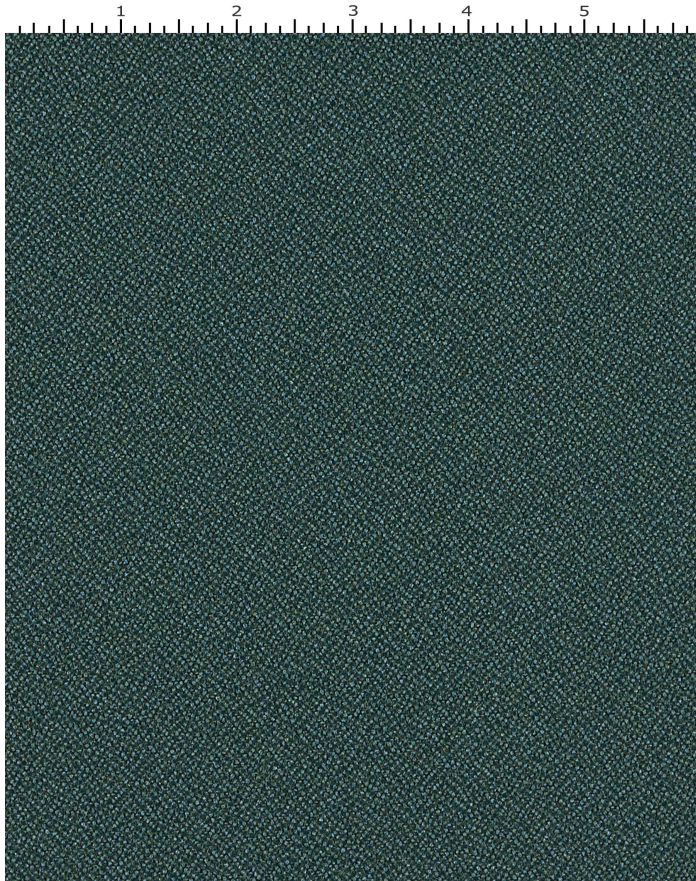

**CATEGORY**  
Seating/Panel

**PROPERTIES**

**CONTENT**  
100% Recycled Polyester (65% Pre-/35% Post-Consumer)

**BACKING**  
None

**ADDITIONAL FINISHING AVAILABLE**  
(CHECK FOR PRICING)  
Nano-Tex, NanoGuard

**FINISH**  
Stain Repellent

**WIDTH**  
54"

**WEIGHT**  
13 oz./linear yard

**SHOWN RR**  
No

**DIR**  
No

**ROLL LENGTH**  
60 yards

**VISUAL REPEAT**  
None

**BREAKING STRENGTH**  
Warp 325/Fill 275

**SEAM SLIPPAGE**  
Warp: 55 lbs. / Fill: 52 lbs.

**ABRASION RESISTANCE**  
Passes 1,000,000 Double Rubs (Wyzenbeek)  
Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

**PILLING RESISTANCE**  
Class 4

**COLORFASTNESS TO CROCKING**  
Dry: Class 4 min/Wet: Class 4

**COLORFASTNESS TO LIGHT**  
40 hours

**FLAMMABILITY**  
Passes Cal 117-2013; NFPA 260/UFAC Class 1; ASTM E84 Class 1 or A. May comply with Cal. Tech. Bul. 133 when combined with appropriate components.

## CLEANING

**WS: Water/Solvent Cleaner** - Spot clean with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding. Always rinse promptly with clean water.

[Additional cleaning details at www.mayerfabrics.com](http://www.mayerfabrics.com)



**GREENGUARD**  
**GOLD Certified**